

## Lumini Aqua 100w

Waterproof, COB LED source with equally-distributed illumination, different version for jellyfish, shark, mermaid, coral aquarium, fot tank



**Dimension:**


18.0"(L)\*12.6"(W)\*6.9"(H)

45.8cm(L)\*31.9cm(W)\*17.5cm(H)

Model	Power Draw	Voltage	LEDs Number	IP Level	Driver
Lumini Aqua 100w	100w	100~240V AC 36V DC	2pcs COB	68	Power adapter



Changing patterns of light for jellyfish tank

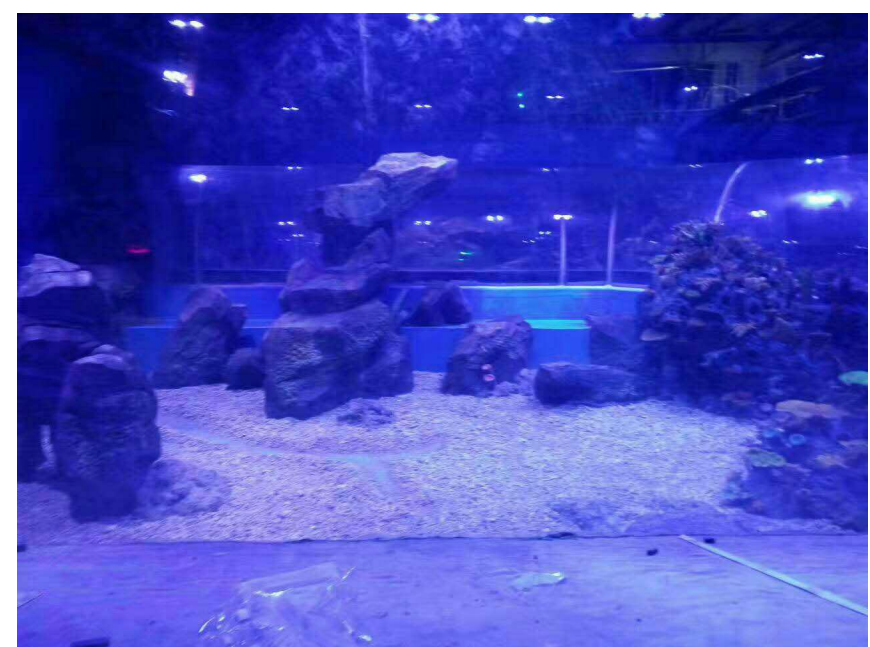

4m deep shark tank



## Lumini Aqua 200w

Waterproof, COB LED source with equally-distributed illumination, different version for jellyfish, shark, mermaid and coral tank




**Dimension:** 18.0"(L)\*12.6"(W)\*6.9"(H) / 45.8cm(L)\*31.9cm(W)\*17.5cm(H)

Model	Power Draw	Voltage	LEDs Number	IP level	Driver
Lumini Aqua 200w	200w	100~240V AC 36V DC	4pcs COB	68	Power adapter

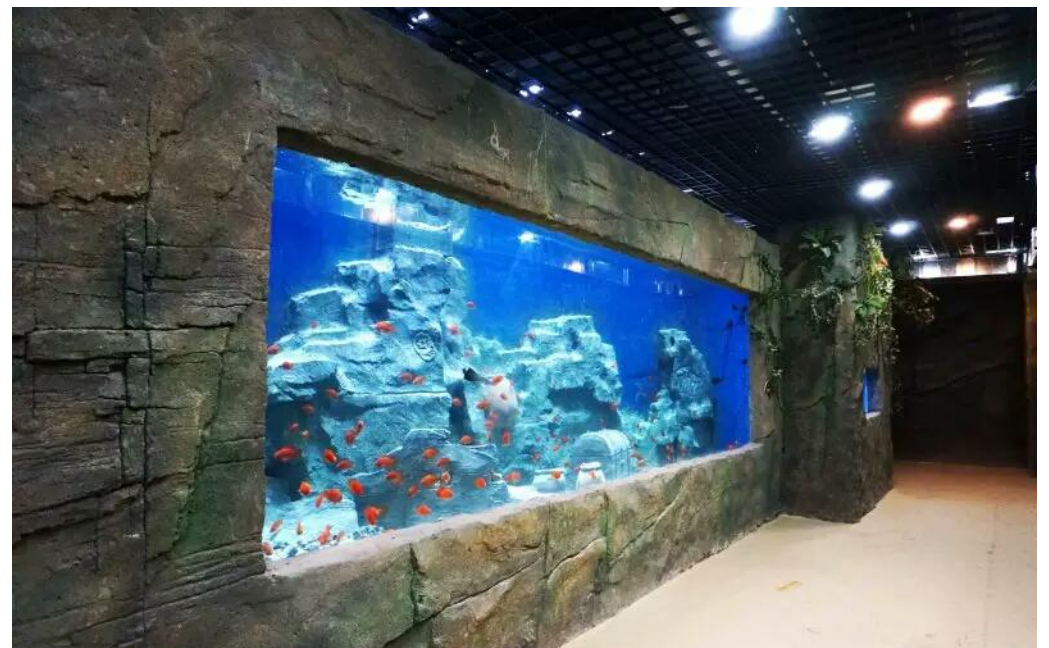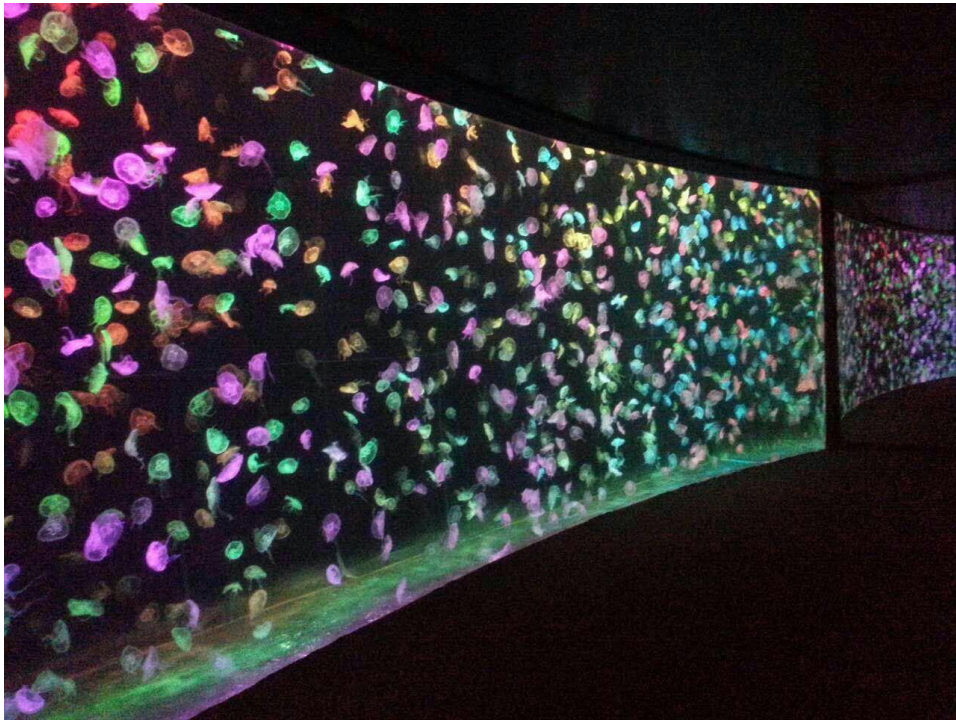

## COB LED Specs

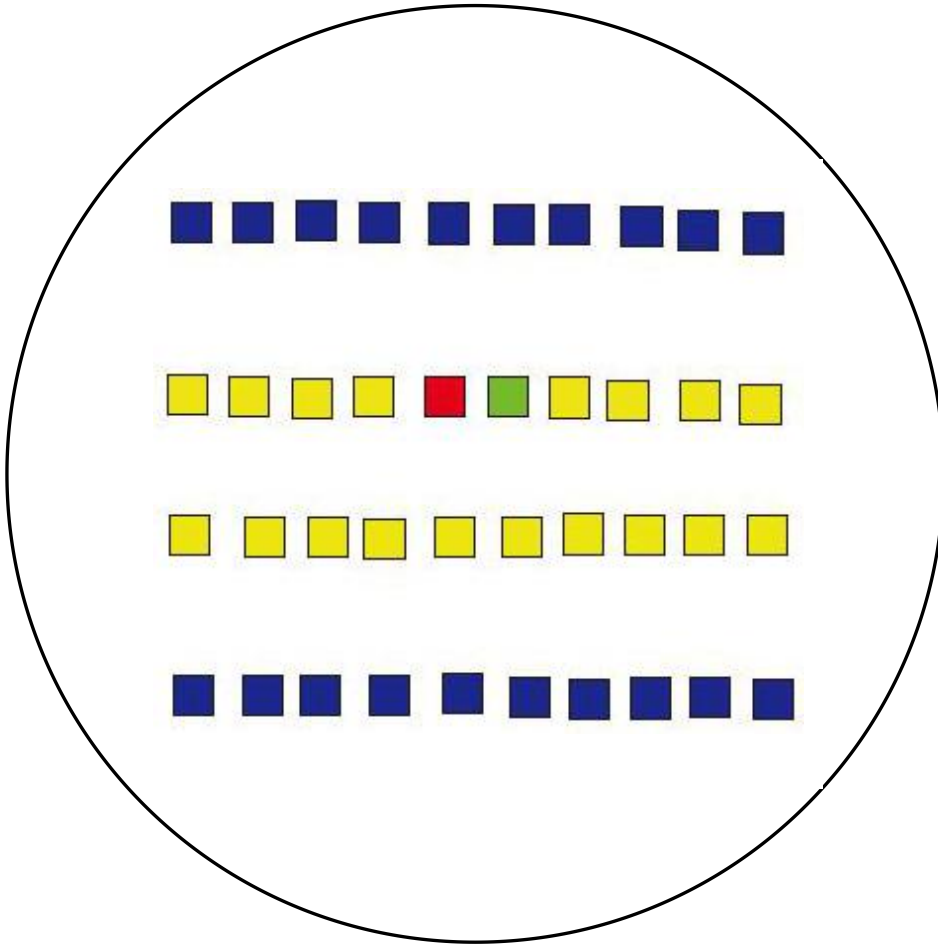

**Brand:** Bridgelux

**LM/W**

White: 120LM/W; Blue 15lm/w

**LED Number:** 40pcs

White: 18pcs

Blue: 10pcs

Royal Blue: 9pcs

UV: 1pcs

Red: 1pcs

Green: 1pcs

**Lifespan:** 50,000hrs

## Power Supply Specs

Voltage Range	Short Circuit Proof	Power Factor	IP Level	Surge Protection
180-260V	Yes	90%	67	Yes



## Dimension

Length: 24.0cm

Width: 9.3cm

Thickness: 5.3cm